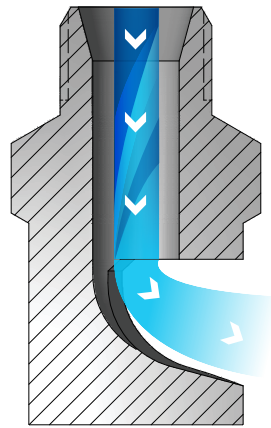


OVERVIEW: FLOODJET

- Ideal for operations requiring wide coverage
- Wide angle, deflected type flat fan spray pattern
- Use when nozzles can be mounted horizontally
- Orifice is protected from damage and is designed to minimize clogging
- Spray angles from 73° to 153°
- Uniform spray distribution from .04 to 110 gpm (.14 to 410 lpm)
- Operating pressures up to 60 psi (4 bar)
- TEK provides a tapered edge spray pattern to eliminate heavy edges while maintaining the wide spray pattern



FloodJet Nozzles

As liquid passes through the nozzle, it hits the deflector surface and spreads out to form a flat spray pattern. The distribution is even from the center of the spray. The deflector surface enables the formation of very wide spray angles compared to other flat spray nozzles.

FLOODJET OPTIONS



ORDERING INFORMATION

FLOODJET K

Inlet Conn.	Nozzle Type	—	Material Code	Capacity Size	<p style="text-align: center;">Example</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px dashed gray; padding: 5px; text-align: center;">1/8</div> <div style="border: 1px dashed gray; padding: 5px; text-align: center;">K</div> <div style="text-align: center;">—</div> <div style="border: 1px dashed gray; padding: 5px; text-align: center;">SS</div> <div style="border: 1px dashed gray; padding: 5px; text-align: center;">2</div> </div>
-------------	-------------	---	---------------	---------------	--

BSPT connections require the addition of a "B" prior to the inlet connection.

FLOODJET TEK

Inlet Conn.	Nozzle Type	—	Material Code	Capacity Size	<p style="text-align: center;">Example</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px dashed gray; padding: 5px; text-align: center;">1/8</div> <div style="border: 1px dashed gray; padding: 5px; text-align: center;">TEK</div> <div style="text-align: center;">—</div> <div style="border: 1px dashed gray; padding: 5px; text-align: center;">SS</div> <div style="border: 1px dashed gray; padding: 5px; text-align: center;">2</div> </div>
-------------	-------------	---	---------------	---------------	--

BSPT connections require the addition of a "B" prior to the inlet connection.

**RELATIVE DROP SIZE
IN MICRONS**

10 to 100	100 to 500	500 to 1000	1000 to 5000
-----------	------------	-------------	--------------

Drop size will vary based on flow rate and pressure.

QUICK REFERENCE GUIDE

Model	Connection	Connection Size (in.)	Materials	Page Number	
				Performance Data	Dimensions and Weights
K nozzle	M	1/8 to 1	Brass, 303 stainless steel (SS), 316 stainless steel (316SS), Polyvinyl chloride (PVC) Brass, 303 stainless steel (SS)	C43–C44	C46
TEK nozzle	M	1/8 to 1/4		C44	
QJA body	F	1/8 to 1/2		–	
QJJA body	M	1/8 to 1/2		–	
QTKA spray tip	NA	NA		C45	
QJJS body	M	1/8 or 1/4		–	
QSTK spray tip	NA	NA		C45	
T body	F	1/8 to 1/2		–	
TT body	M	1/8 to 1/2		–	
TK spray tip	NA	NA	C45–C46		

F = female thread; M = male thread; NA = not applicable. There is no material code for brass. Leave material code blank when ordering. Other materials available upon request. For more dimensions and sizes, contact your sales engineer.

W PERFORMANCE DATA:
WIDE ANGLE SPRAY



Nozzle Type	Inlet Conn. (in.)						Capacity Size	Equiv. Orifice Dia. (mm)	Flow Rate Capacity (liters per minute)							Spray Angle (°)		
	1/8	1/4	3/8	1/2	3/4	1			0.2 bar	0.5 bar	0.7 bar	1.5 bar	2 bar	3 bar	4 bar	0.5 bar	1.5 bar	4 bar
●	●						.25	.43	–	–	–	.14	.16	.20	.23	–	83	117
●	●						.50	.58	–	–	–	.28	.32	.39	.46	–	89	122
●	●						.75	.74	–	–	.29	.42	.48	.59	.68	–	106	125
●	●						1	.84	–	–	.38	.56	.64	.79	.91	–	103	128
●	●						1.5	1.0	–	.48	.57	.84	.97	1.2	1.4	73	103	125
●	●	●					2	1.2	–	.64	.76	1.1	1.3	1.6	1.8	83	113	129
●	●	●					2.5	1.3	–	.81	.95	1.4	1.6	2.0	2.3	98	122	133
●	●	●					3	1.4	–	.97	1.1	1.7	1.9	2.4	2.7	86	112	126
●	●	●					4	1.7	–	1.3	1.5	2.2	2.6	3.2	3.6	97	123	132
●	●	●					5	1.9	1.0	1.6	1.9	2.8	3.2	3.9	4.6	114	128	142
●	●	●					7.5	2.3	1.5	2.4	2.9	4.2	4.8	5.9	6.8	101	119	134
●	●	●					10	2.7	2.0	3.2	3.8	5.6	6.4	7.9	9.1	115	133	145
●	●	●					12	2.9	2.4	3.9	4.6	6.7	7.7	9.5	10.9	128	139	153
●	●	●					15	3.3	3.1	4.8	5.7	8.4	9.7	11.8	13.7	98	113	123
●	●	●					18	3.6	3.7	5.8	6.9	10.1	11.6	14.2	16.4	106	120	131
●	●	●					20	3.8	4.1	6.4	7.6	11.2	12.9	15.8	18.2	110	122	133

Highlighted column shows the rated pressure.



W PERFORMANCE DATA:
WIDE ANGLE SPRAY

Nozzle Type	Inlet Conn. (in.)						Capacity Size	Equiv. Orifice Dia. (mm)	Flow Rate Capacity (liters per minute)							Spray Angle (°)		
	K	1/8	1/4	3/8	1/2	3/4			1	0.2 bar	0.5 bar	0.7 bar	1.5 bar	2 bar	3 bar	4 bar	0.5 bar	1.5 bar
●		●					22	3.9	4.5	7.1	8.4	12.3	14.2	17.4	20	113	125	136
●		●					24	4.1	4.9	7.7	9.2	13.4	15.5	19.0	22	115	131	144
●		●					27	4.4	5.5	8.7	10.3	15.1	17.4	21	25	119	135	148
●			●				30	4.6	6.1	9.7	11.4	16.8	19.3	24	27	100	110	121
●			●				35	5.0	7.1	11.3	13.3	19.5	23	28	32	105	118	128
●			●	●			40	5.3	8.2	12.9	15.3	22	26	32	36	111	126	136
●			●				45	5.6	9.2	14.5	17.2	25	29	36	41	115	130	140
●				●			50	5.9	10.2	16.1	19.1	28	32	39	46	117	131	140
●				●			60	6.5	12.2	19.3	23	34	39	47	55	120	134	142
●				●			70	7.0	14.3	23	27	39	45	55	64	123	137	146
●				●			80	7.5	16.3	26	31	45	52	63	73	127	138	149
●					●		90	8.1	18.3	29	34	50	58	71	82	120	133	140
●					●		100	8.5	20	32	38	56	64	79	91	123	136	145
●					●		110	8.9	22	35	42	61	71	87	100	125	138	148
●					●		120	9.3	24	39	46	67	77	95	109	129	143	150
●					●		140	10.0	29	45	53	78	90	111	128	118	127	135
●					●		160	10.7	33	52	61	89	103	126	146	121	130	137
●					●		180	11.4	37	58	69	101	116	142	164	124	133	139
●					●		210	12.3	43	68	80	117	135	166	191	128	139	145
●						●	300	14.8	61	97	114	168	193	237	274	110	128	135
●						●	450	18.0	92	145	172	251	290	355	410	118	132	138

Highlighted column shows the rated pressure.

W PERFORMANCE DATA:
WIDE ANGLE SPRAY

Inlet Conn. (in.)	Nozzle Type	Capacity Size	Equiv. Orifice Dia. (mm)	Flow Rate Capacity (liters per minute)							Spray Angle (°)		
				0.2 bar	0.5 bar	0.7 bar	1.5 bar	2 bar	3 bar	4 bar	0.5 bar	1.5 bar	4 bar
1/8, 1/4	●	2	1.2	–	.64	.76	1.1	1.3	1.6	1.8	85	125	134
	●	3	1.5	–	.97	1.1	1.7	1.9	2.4	2.7	85	125	136
	●	5	1.9	1.0	1.6	1.9	2.8	3.2	3.9	4.6	85	127	147
	●	10	2.7	2.0	3.2	3.8	5.6	6.4	7.9	9.1	85	130	150
1/4	●	15	3.3	3.1	4.8	5.7	8.4	9.7	11.8	13.7	90	130	138
	●	20	3.8	4.1	6.4	7.6	11.2	12.9	15.8	18.2	107	130	138

Highlighted column shows the rated pressure.





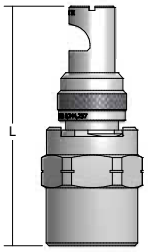
W PERFORMANCE DATA:
WIDE ANGLE SPRAY

Inlet Conn. (in.)	UniJet® FloodJet Tip Type	Capacity Size	Equiv. Orifice Dia. (mm)	Flow Rate Capacity (liters per minute)							Spray Angle (°)		
				0.2 bar	0.5 bar	0.7 bar	1.5 bar	2 bar	3 bar	4 bar	0.5 bar	1.5 bar	4 bar
1/4	●	7.5	2.3	1.5	2.4	2.9	4.2	4.8	5.9	6.8	101	119	134
	●	10	2.7	2.0	3.2	3.8	5.6	6.4	7.9	9.1	115	133	145
	●	12	2.9	2.4	3.9	4.6	6.7	7.7	9.5	10.9	128	139	153
	●	15	3.3	3.1	4.8	5.7	8.4	9.7	11.8	13.7	98	113	123
	●	18	3.6	3.7	5.8	6.9	10.1	11.6	14.2	16.4	106	120	131
	●	20	3.8	4.1	6.4	7.6	11.2	12.9	15.8	18.2	110	122	133
	●	24	4.1	4.9	7.7	9.2	13.4	15.5	19.0	22	115	131	144
	●	30	4.6	6.1	9.7	11.4	16.8	19.3	24	27	100	110	121
	●	40	5.3	8.2	12.9	15.3	22	26	32	36	111	126	136
	●	50	5.9	10.2	16.1	19.1	28	32	39	46	117	131	140



Other body types may be available. Contact your sales engineer for further information.

Highlighted column shows the rated pressure.

DIMENSIONS AND WEIGHTS

Nozzle	Nozzle Type	Inlet Conn. (in.)	L (mm)	Hex. (in.)	D (Dia.) (mm)	Net Weight (kg)
	K (M)	1/8	32.5	7/16	–	0.01
		1/4	34.1	9/16	–	0.03
		3/8	44.5	11/16	–	0.06
		1/2	50.8	7/8	–	0.11
		3/4	65.1	1-1/2	–	0.40
		1	92.1	1-7/8	–	0.91
	TEK (M)	1/8	28.6	7/16	–	0.02
		1/4	38.6	9/16	–	0.04
	QJA (F) + QTKA	1/8, 1/4, 3/8, 1/2	64.3	1	–	0.14
	QJJA (M) + QTKA	1/8, 1/4, 3/8, 1/2	61.9	7/8	–	0.13

Based on the largest/heaviest version of each type.

Nozzle	Nozzle Type	Inlet Conn. (in.)	L (mm)	Hex. (in.)	D (Dia.) (mm)	Net Weight (kg)
	QJJS (M) + QSTK	1/8, 1/4, 3/8, 1/2	37.3	9/16	15.1	0.04
	T (F) + TK	1/4	50.8	13/16	–	0.07
	TT (M) + TK	1/4	50.8	13/16	–	0.06

Based on the largest/heaviest version of each type.