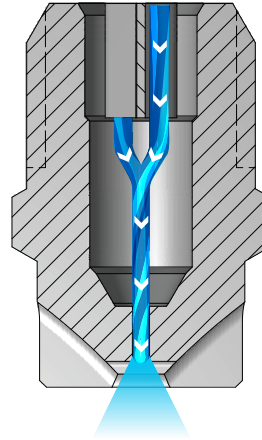


**OVERVIEW: WASHJET**

- High-impact sprays and high pressure operation ensure optimal cleaning – ideal for pressure washing
- Long wear life – 400 series stainless steel material
- Flat spray nozzles provide an even edge fan type spray pattern
- Uniform spray distribution from .27 to 78 gpm (1.0 to 290 lpm) by using optional internal guide vane to stabilize liquid turbulence
- Spray angles from 0° (solid stream) to 65° for MEG, WEG and MEG-SSTC; 0° to 80° for IMEG
- Operating pressures from 300 to 4000 psi (20 to 275 bar)
- MEG-SSTC nozzles have tungsten carbide orifice inserts for maximum erosion resistance
- IMEG® versions are ideal for critical, demanding operations  
Features:
  - Patented design that optimizes fluid dynamics by minimizing turbulence
  - Higher impact per unit area than MEG nozzles



**WashJet Nozzles**  
As the liquid exits through the rounded U shape of the orifice, it forms into a flat spray pattern. The distribution is even at pressures above 300 psi (20 bar).

**WASHJET OPTIONS**



**ORDERING INFORMATION**

**WASHJET MEG, WEG, MEG-SSTC AND IMEG WITH GUIDE VANE**

Inlet Conn.	Nozzle Type	–	Spray Angle	Capacity Size	<b>Example</b>
					1/4 MEG – 15 04

BSPT connections require the addition of a "B" prior to the inlet connection.

**WASHJET MEG, WEG, MEG-SSTC AND IMEG WITHOUT GUIDE VANE**

Inlet Conn.	Nozzle Type	–	Spray Angle	Capacity Size	<b>Example</b>
					1/4 SAMEG – 15 04

BSPT connections require the addition of a "B" prior to the inlet connection.

**QUICK REFERENCE GUIDE**

Model	Connection	Connection Size (in.)	Materials	Page Number	
				Performance Data	Dimensions and Weights
<b>MEG</b>	M	1/8 to 1/4	Hardened stainless steel	C34–C35	C37
<b>WEG</b>	F	1/8 to 1/4		C35	
<b>MEG-SSTC</b>	M	1/4		C34–C35	
<b>IMEG®</b>	M	1/8 to 1/4		C36	
<b>QCMEG</b>	NA	NA		C36	
<b>QCIMEG</b>	NA	NA		C37	

F = female thread; M = male thread; NA = not applicable. Material is built into part number for ordering. For more dimensions and sizes, contact your sales engineer.

**S** PERFORMANCE DATA:  
**STANDARD ANGLE SPRAY**



Nozzle Type and Spray Angle																	Capacity Size	Flow Rate Capacity (liters per minute)														
1/8 MEG					1/4 MEG					1/4 MEG-SSTC								3 bar	20 bar	35 bar	50 bar	80 bar	100 bar	140 bar	170 bar	200 bar						
0°*	5°	15°	25°	40°	50°	65°	0°*	5°	15°	25°	40°	50°	65°	0°*	5°	15°											25°	40°	50°	65°		
									•						•	•			•			01	.39	1.0	1.3	1.6	2.0	2.3	2.7	3.0	3.2	
									•														015	.59	1.5	2.0	2.4	3.1	3.4	4.0	4.5	4.8
•	•	•	•	•			•	•	•	•	•			•	•	•		•	•				02	.79	2.0	2.7	3.2	4.1	4.6	5.4	5.9	6.4
														•									025	.99	2.5	3.4	4.0	5.1	5.7	6.7	7.4	8.1
•		•	•	•	•		•	•	•	•	•	•	•	•	•		•			•	•		03	1.2	3.1	4.0	4.8	6.1	6.8	8.1	8.9	9.7
									•	•	•	•											035	1.4	3.6	4.7	5.6	7.1	8.0	9.4	10.4	11.3
•		•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•		•	•		04	1.6	4.1	5.4	6.4	8.2	9.1	10.8	11.9	12.9
•		•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•		•	•		045	1.8	4.6	6.1	7.3	9.2	10.3	12.1	13.4	14.5
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•			05	2.0	5.1	6.7	8.1	10.2	11.4	13.5	14.9	16.1
•		•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•		•	•		055	2.2	5.6	7.4	8.9	11.2	12.5	14.8	16.3	17.7
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•			06	2.4	6.1	8.1	9.7	12.2	13.7	16.2	17.8	19.3
•		•	•	•	•		•	•	•	•	•	•	•										065	2.6	6.6	8.8	10.5	13.3	14.8	17.5	19.3	21
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•			07	2.8	7.1	9.4	11.3	14.3	16.0	18.9	21	23
•		•	•	•	•		•	•	•	•	•	•											075	3.0	7.6	10.1	12.1	15.3	17.1	20	22	24
•		•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•		•		08	3.2	8.2	10.8	12.9	16.3	18.2	22	24	26
•		•	•	•	•		•	•	•	•	•												085	3.4	8.7	11.5	13.7	17.3	19.4	23	25	27
•		•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•		•		09	3.6	9.2	12.1	14.5	18.3	21	24	27	29
		•	•				•		•		•												095	3.8	9.7	12.8	15.3	19.4	22	26	28	31
•		•	•	•	•	•	•		•	•	•	•	•	•	•		•	•		•	•		10	3.9	10.2	13.5	16.1	20	23	27	30	32
•			•				•		•	•	•												11	4.3	11.2	14.8	17.7	22	25	30	33	35
•		•	•																				115	4.5	11.7	15.5	18.5	23	26	31	34	37
•				•			•	•	•	•	•	•	•	•	•		•			•			12	4.7	12.2	16.2	19.3	24	27	32	36	39
•							•		•	•	•												125	4.9	12.7	16.9	20	25	28	34	37	40

\*0° = Solid Stream.  
Highlighted column shows the rated pressure.

**S** PERFORMANCE DATA: STANDARD ANGLE SPRAY

Nozzle Type and Spray Angle																		Capacity Size	Flow Rate Capacity (liters per minute)														
1/8 MEG						1/4 MEG						1/4 MEG-SSTC							3 bar	20 bar	35 bar	50 bar	80 bar	100 bar	140 bar	170 bar	200 bar						
0°*	5°	15°	25°	40°	50°	65°	0°*	5°	15°	25°	40°	50°	65°	0°*	5°	15°	25°											40°	50°	65°			
•							•		•	•	•												13	5.1	13.3	17.5	21	27	30	35	39	42	
	•								•	•														14	5.5	14.3	18.9	23	29	32	38	42	45
•		•	•				•	•	•	•	•	•	•	•		•		•						15	5.9	15.3	20	24	31	34	40	45	48
		•					•		•															16	6.3	16.3	22	26	33	36	43	48	52
							•		•	•	•				•									18	7.1	18.3	24	29	37	41	49	53	58
•							•	•	•	•	•	•	•	•	•									20	7.9	20	27	32	41	46	54	59	64
							•	•	•	•	•													25	9.9	25	34	40	51	57	67	74	81
							•	•	•	•	•		•											30	11.8	31	40	48	61	68	81	89	97
							•		•	•	•													35	13.8	36	47	56	71	80	94	104	113
							•	•	•	•	•													40	15.8	41	54	64	82	91	108	119	129
							•		•	•	•													50	19.7	51	67	81	102	114	135	149	161
							•		•	•	•													60	24	61	81	97	122	137	162	178	193
							•																	70	28	71	94	113	143	160	189	208	226
							•																	80	32	82	108	129	163	182	216	238	258
							•																	90	36	92	121	145	183	205	243	267	290

\*0° = Solid Stream.

Highlighted column shows the rated pressure.

**S** PERFORMANCE DATA: STANDARD ANGLE SPRAY

Nozzle Type and Spray Angle														Capacity Size	Flow Rate Capacity (liters per minute)																			
1/8 WEG							1/4 WEG								3 bar	20 bar	35 bar	50 bar	80 bar	100 bar	140 bar	170 bar	200 bar											
0°*	5°	15°	25°	40°	50°	65°	0°*	5°	15°	25°	40°	50°	65°																					
		•	•	•																				03	1.2	3.1	4.0	4.8	6.1	6.8	8.1	8.9	9.7	
•		•	•	•	•	•	•			•	•	•		•											04	1.6	4.1	5.4	6.4	8.2	9.1	10.8	11.9	12.9
		•	•	•						•	•	•													045	1.8	4.6	6.1	7.3	9.2	10.3	12.1	13.4	14.5
•		•	•	•	•	•	•	•		•	•	•	•	•		•									05	2.0	5.1	6.7	8.1	10.2	11.4	13.5	14.9	16.1
•		•	•	•	•	•	•	•		•	•														055	2.2	5.6	7.4	8.9	11.2	12.5	14.8	16.3	17.7
•		•	•	•	•	•	•	•		•	•	•													06	2.4	6.1	8.1	9.7	12.2	13.7	16.2	17.8	19.3
				•						•															065	2.6	6.6	8.8	10.5	13.3	14.8	17.5	19.3	21
•		•	•	•	•	•	•	•		•	•	•		•											07	2.8	7.1	9.4	11.3	14.3	16.0	18.9	21	23
•		•	•	•	•	•	•	•		•	•	•													08	3.2	8.2	10.8	12.9	16.3	18.2	22	24	26
•		•	•	•																					085	3.4	8.7	11.5	13.7	17.3	19.4	23	25	27
•		•	•	•	•	•	•	•		•	•	•													09	3.6	9.2	12.1	14.5	18.3	21	24	27	29
			•																						095	3.8	9.7	12.8	15.3	19.4	22	26	28	31
•		•	•	•	•	•	•	•		•	•	•													10	3.9	10.2	13.5	16.1	20	23	27	30	32
							•																		15	5.9	15.3	20	24	31	34	40	45	48
		•																							16	6.3	16.3	22	26	33	36	43	48	52
•																									20	7.9	20	27	32	41	46	54	59	64
							•																		30	11.8	31	40	48	61	68	81	89	97

\*0° = Solid Stream.

Highlighted column shows the rated pressure.






**S** PERFORMANCE DATA:  
**STANDARD ANGLE SPRAY**



Nozzle Type	Spray Angle at 3 bar				Capacity Size	Flow Rate Capacity (liters per minute)										
	10° (Orange)	15° (Yellow)	25° (Green)	40° (White)		3 bar	20 bar	35 bar	50 bar	80 bar	100 bar	140 bar	170 bar	200 bar	250 bar	275 bar
●			●	●	02	.79	2.0	2.7	3.2	4.1	4.6	5.4	5.9	6.4	7.2	7.6
●	●	●	●	●	03	1.2	3.1	4.0	4.8	6.1	6.8	8.1	8.9	9.7	10.8	11.3
●	●	●	●	●	035	1.4	3.6	4.7	5.6	7.1	8.0	9.4	10.4	11.3	12.6	13.2
●	●	●	●	●	04	1.6	4.1	5.4	6.4	8.2	9.1	10.8	11.9	12.9	14.4	15.1
●	●	●	●	●	045	1.8	4.6	6.1	7.3	9.2	10.3	12.1	13.4	14.5	16.2	17.0
●	●	●	●	●	05	2.0	5.1	6.7	8.1	10.2	11.4	13.5	14.9	16.1	18.0	18.9
●	●	●	●	●	055	2.2	5.6	7.4	8.9	11.2	12.5	14.8	16.3	17.7	19.8	21
●	●	●	●	●	06	2.4	6.1	8.1	9.7	12.2	13.7	16.2	17.8	19.3	22	23
●	●	●	●	●	065	2.6	6.6	8.8	10.5	13.3	14.8	17.5	19.3	21	23	25
●	●	●	●	●	07	2.8	7.1	9.4	11.3	14.3	16.0	18.9	21	23	25	26
●	●	●	●	●	075	3.0	7.6	10.1	12.1	15.3	17.1	20	22	24	27	28
●	●	●	●	●	08	3.2	8.2	10.8	12.9	16.3	18.2	22	24	26	29	30
●		●	●	●	09	3.6	9.2	12.1	14.5	18.3	21	24	27	29	32	34

Highlighted column shows the rated pressure.

**DIMENSIONS AND WEIGHTS**

Nozzle	Nozzle Type	Inlet Conn. (in.)	L (mm)	Hex. (in.)	D (Dia.) (mm)	Flats (mm)	Net Weight (kg)
	MEG (M)	1/8	25.4	9/16	-	7.9	0.02
		1/4	25.4	9/16	-	10.3	0.02
	WEG (F)	1/8	28.6	1/2	-	7.9	0.03
		1/4	28.6	5/8	-	7.9	0.02
	MEG-SSTC (M)	1/4	23.0	9/16	-	10.3	0.02

Based on the largest/heaviest version of each type.

Nozzle	Nozzle Type	Inlet Conn. (in.)	L (mm)	Hex. (in.)	D (Dia.) (mm)	Flats (mm)	Net Weight (kg)
	IMEG® (M)	1/8	22.2	1/2	-	7.9	0.02
		1/4	23.0	9/16	-	10.3	0.02
	QCIMEG/ QCIMEG	-	31.0	-	24.6	-	0.02

Based on the largest/heaviest version of each type.