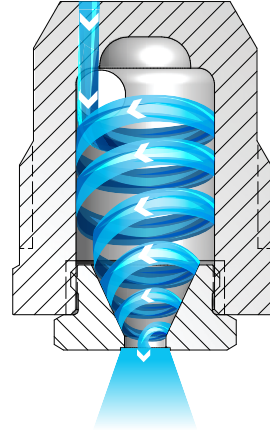


OVERVIEW: WHIRLJET IN-LINE, OFFSET AND DEFLECTED SPRAYS

- Hollow cone spray pattern
- In-line versions ideal for dust control in mining operations
 - BD versions have a lower profile projection for installation in a tee or pipe header
 - In-line BDM features recessed orifice area to protect from damage; self-locking cap to prevent loss due to vibration; fiberglass-reinforced nylon inlet body
- BA offset style ideal for installations with physical space limitations
- Spray angles: Standard – 43° to 94°, Wide – 102° to 125°
- Deflected spray versions available with 120°, 150° and 180° included angle of spray at 10 psi (0.7 bar)
- Uniform spray distribution from .11 to 38 gpm (.41 to 145 lpm)
- Operating pressures up to 500 psi (35 bar)



WhirlJet BD, BDM and BA Nozzles

Liquid passes through a hole on the inlet side of the nozzle. The liquid then enters a whirlchamber where it spins in a circle at high speed. The rotation forces the liquid away from the center toward the edges. This causes the liquid to exit the orifice in a hollow cone pattern.

WHIRLJET OPTIONS



BD
3/8" to 1-1/2" male conn.
In-line nozzle
Removable cap



BDM "Miner Nozzle"
3/8" male conn.
In-line nozzle
Removable cap/nylon body



BA
3/8" to 1/2" male conn.
Offset style nozzle
Removable cap



DeflectoJet® 8686
1/8" to 3/8" male conn.
Deflected nozzle
Removable deflector cap

RELATIVE DROP SIZE IN MICRONS

10 to 100

100 to 500

500 to 1000

1000 to 5000

Drop size will vary based on flow rate and pressure.



ORDERING INFORMATION

WHIRLJET BD

Inlet Conn.	Nozzle Type	—	Material Code	Capacity Size
-------------	-------------	---	---------------	---------------

Example
3/8 BD — SS 10

BSPT connections require the addition of a "B" prior to the inlet connection.

WHIRLJET BDM

Inlet Conn.	Nozzle Type	—	Capacity Size
-------------	-------------	---	---------------

Example
3/8 BDM — 5

BSPT connections require the addition of a "B" prior to the inlet connection.

WHIRLJET BA

Inlet Conn.	Nozzle Type	—	Material Code	Capacity Size
-------------	-------------	---	---------------	---------------

Example
1/2 BA — SS 25

BSPT connections require the addition of a "B" prior to the inlet connection.

DEFLECTOJET 8686

Nozzle No.	Inlet Conn.	—	Material Code	Capacity Size	—	Spray Angle
------------	-------------	---	---------------	---------------	---	-------------

Example
8686 — 1/4 — SS 1 — 120

BSPT connections require the addition of a "B" prior to the nozzle number.

QUICK REFERENCE GUIDE

Model	Connection	Connection Size (in.)	Materials	Page Number	
				Performance Data	Dimensions and Weights
BD	M	3/8 to 1-1/2	Brass, 303 stainless steel (SS)	D29	D32
BD-W	M	3/8 to 3/4	Brass, 303 stainless steel (SS)	D30	
BDM	M	3/8	Nylon/Brass cap	D30	
BA	M	3/8 to 1/2	Brass, 303 stainless steel (SS), 309 stainless steel (309SS)	D31	
8686	M	1/8 to 3/8	Brass, 303 stainless steel (SS)	D31	

M = male thread. There is no material code for brass. Leave material code blank when ordering. Other materials available upon request.
 For more dimensions and sizes, contact your sales engineer.





W PERFORMANCE DATA:
WIDE ANGLE SPRAY

Inlet Conn. (in.)	Nozzle Type BD-W	Capacity Size	Inlet Dia. Nom. (mm)	Orifice Dia. Nom. (mm)	Flow Rate Capacity (liters per minute)											Spray Angle (°)		
					0.2 bar	0.4 bar	0.5 bar	0.7 bar	1 bar	1.5 bar	2 bar	3 bar	4 bar	6 bar	7 bar	0.5 bar	1.5 bar	6 bar
3/8	●	3-2W	2.4	2.0	–	–	.73	.84	1.0	1.2	1.4	1.7	2.0	2.5	2.7	112	109	90
	●	3-3W	2.4	2.8	–	–	.96	1.1	1.4	1.7	1.9	2.4	2.7	3.4	3.6	115	112	97
	●	3-5W	2.4	3.2	–	–	1.1	1.3	1.6	1.9	2.2	2.7	3.1	3.8	4.2	117	113	103
	●	5-5W	2.8	3.2	–	–	1.6	1.9	2.3	2.8	3.2	3.9	4.5	5.6	6.1	115	112	102
	●	5-10W	2.8	4.4	–	1.5	2.1	2.5	3.0	3.6	4.1	5.1	6.0	7.2	8.0	119	119	109
	●	8-8W	3.9	3.9	–	1.8	2.6	3.1	3.6	4.4	5.2	6.3	7.4	9.0	9.5	116	110	98
	●	8-10W	3.9	4.4	–	2.1	2.9	3.4	4.1	5.1	6.0	7.1	8.2	9.9	10.7	118	113	101
	●	10-10W	3.9	4.4	–	2.3	3.2	3.8	4.5	5.5	6.3	7.9	9.3	11.0	11.8	118	111	100
1/2	●	5-3W	3.2	2.8	.67	.75	1.0	1.2	1.5	1.8	2.0	2.5	2.9	3.5	3.8	118	113	100
	●	5-5W	3.2	3.2	1.0	1.1	1.6	1.9	2.3	2.8	3.2	3.9	4.5	5.6	6.1	121	116	102
	●	8-8W	3.9	3.9	1.6	1.8	2.6	3.1	3.6	4.4	5.2	6.3	7.4	9.0	9.5	119	113	103
	●	10-15W	4.4	5.6	2.5	2.8	3.9	4.6	5.6	6.7	7.8	9.5	11.1	13.4	14.5	120	112	102
	●	15-15W*	4.4	5.6	3.0	3.4	5.0	5.7	6.7	8.3	9.7	11.9	14.1	16.7	18.3	117	111	104
3/4	●	8-25W	4.4	7.5	2.6	2.9	4.2	5.0	6.0	7.5	8.6	10.3	11.9	14.6	15.6	124	120	111
	●	10-10W	5.2	4.4	2.0	2.2	3.2	3.8	4.5	5.5	6.3	7.9	9.3	11.0	11.8	118	111	100
	●	10-30W	5.2	7.9	3.7	4.1	6.2	7.2	8.6	10.3	11.9	14.6	16.8	21	23	124	117	108
	●	15-15W	6.4	5.6	3.0	3.4	5.0	5.7	6.7	8.3	9.7	11.9	13.8	16.7	18.3	117	112	102
	●	15-25W	6.4	7.5	4.1	4.6	6.2	7.3	8.9	10.7	12.6	15.4	17.9	22	23	119	114	106
	●	20-25W	7.1	7.5	4.8	5.4	8.1	9.5	11.5	13.8	16.0	19.7	23	28	30	118	112	105
	●	20-30W	7.1	7.9	5.2	5.8	8.5	9.9	11.9	14.6	16.8	21	24	29	31	118	112	105
	●	25-25W	7.1	7.5	5.2	5.8	8.1	9.5	11.5	13.8	16.0	19.7	23	28	30	117	110	103
	●	25-30W	7.1	7.9	5.6	6.3	8.9	10.7	12.7	15.8	18.2	22	26	31	34	117	110	103

*Dual inlets, each in diameter specified.

Highlighted column shows the rated pressure.

S PERFORMANCE DATA:
STANDARD ANGLE SPRAY





Inlet Conn. (in.)	Nozzle Type BDM	Capacity Size	Orifice Dia. Nom. (mm)	Flow Rate Capacity (liters per minute)								Spray Angle (°)		
				0.7 bar	1.5 bar	3 bar	7 bar	15 bar	20 bar	25 bar	35 bar	1.5 bar	7 bar	35 bar
3/8	●	2-0.5	1.2	–	–	.63	.96	1.4	1.6	1.8	2.2	–	52	45
	●	2-1	1.6	–	.61	.87	1.3	1.9	2.2	2.5	3.0	53	65	50
	●	2	2.0	.76	1.1	1.6	2.4	3.5	4.1	4.6	5.4	60	69	62
	●	3-2	2.0	.84	1.2	1.7	2.7	3.9	4.5	5.0	5.9	57	68	58
	●	3	2.4	1.1	1.7	2.4	3.6	5.3	6.1	6.8	8.1	64	75	64
	●	5	3.2	1.9	2.8	3.9	6.0	8.8	10.2	11.4	13.5	73	78	72
	●	10-2	2.0	1.3	2.0	2.8	4.2	6.2	7.1	8.0	9.4	30	46	40
	●	20-10	4.4	5.3	7.8	11.1	16.9	25	29	32	38	61	60	49

Maximum recommended operating pressure is 500 psi (34.5 bar).

Highlighted column shows the rated pressure.



DIMENSIONS AND WEIGHTS

Nozzle	Nozzle Type	Inlet Conn. (in.)	L (mm)	Hex. (in.)	A (mm)	B (mm)	C (mm)	Net Weight (kg)
	BD (M)	3/8	31.8	11/16	–	6.7	–	0.03
		1/2	37.3	7/8	–	8.0	–	0.06
		3/4	44.5	1-1/16	–	9.5	–	0.11
		1-1/2	66.7	2	–	8.0	–	0.60
	BD-W (M)	3/8	31.8	11/16	–	6.7	–	0.03
		1/2	37.3	7/8	–	7.9	–	0.06
		3/4	44.4	1-1/16	–	9.5	–	0.11
	BDM (M)	3/8	32.5	11/16	6.7	–	–	0.01
	BA (M)	3/8	38.1	–	26.6	14.7	24.2	0.11
		1/2	55.6	–	42.9	14.7	27.4	0.27
	8686 (M)	1/8	30.2	1/2	–	–	–	0.02
		1/4	33.3	5/8	–	–	–	0.03
		3/8	44.5	7/8	–	–	–	0.08

Based on the largest/heaviest version of each type.