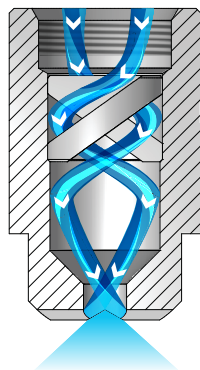


OVERVIEW: FULLJET SQUARE AND OVAL SPRAY PATTERNS AND VANELESS DESIGN

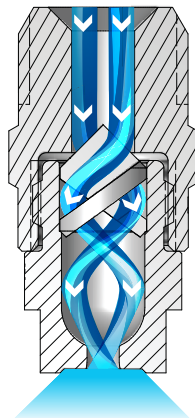
FullJet G and H Square Spray Nozzles



**Square spray**

As the liquid enters the nozzle, it flows over and through the vane. This creates the initial swirling of the liquid. The design of the nozzle ensures the liquid continues to swirl after passing through the vane. As the liquid exits the orifice, it interacts with cross cuts located on the face of the nozzle and forms a square spray pattern.

FullJet G-VL and GG-VL Nozzles



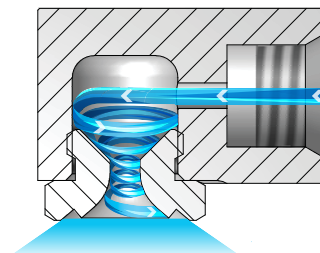
**Oval spray**

As the liquid enters the nozzle, it flows over and through the vane. This creates the initial swirling of the liquid. The design of the nozzle ensures the liquid continues to swirl after passing through the vane. The exit orifice of the nozzle has an oval shape. The liquid follows the oval shape as it exits the nozzle.

FullJet GANV and GGANV Nozzles

**Vaneless spray**

The liquid begins to swirl as it enters the swirlchamber. The swirling continues as it passes through the orifice. The breakup of the liquid occurs as it exits the nozzle orifice in a well-defined cone pattern.



FULLJET SQUARE SPRAY PATTERN

- Cone-shaped spray pattern with square-like impact area for coverage of rectangular areas or spray zones
- Unique vane design and large flow passages provide superior spray pattern control
- Uniform spray distribution from .26 to 1977 gpm (1.1 to 7371 lpm)
- Operating pressures up to 150 psi (10 bar)
- Spray angles: Standard – 43° to 94°, Wide – 112° to 120°



**G-SQ**

1/8" to 1/2" female conn.  
Removable cap and vane



**H-SQ**

1" female conn.  
One-piece body

FULLJET SQUARE SPRAY OPTIONS



**GG-SQ** – 1/8" to 1/2" male conn.  
Removable cap and vane



**H-SQ** – 1-1/4" to 6" female conn.  
Removable vane/cast body



**HH-SQ** – 1/8" to 1" male conn.  
One-piece body



**H-WSQ** – 3/4" to 1" female conn.  
One-piece body



**H-WSQ** – 1-1/4" to 3" female conn.  
Removable vane/cast body



**HH-WSQ** – 1/4" to 1" male conn.  
One-piece body

**FULLJET OVAL SPRAY PATTERN**

- Solid cone-shaped spray pattern with oval impact area; the width of the spray is approximately half its length
- Unique vane design provides superior spray pattern control
- Uniform spray distribution from .59 to 3.2 gpm (2.2 to 11.9 lpm)
- Operating pressures up to 150 psi (10 bar)
- Spray angles: Standard – 43° to 94°



**G-VL** – 3/8" female conn.  
Removable cap and vane



**GG-VL** – 3/8" male conn.  
Removable cap and vane

**FULLJET VANELESS DESIGN**

- Solid cone-shaped spray pattern with round impact area
- Uniform spray distribution from .35 to 23 gpm (1.4 to 87 lpm)
- Operating pressures up to 100 psi (7 bar)
- No vane for unrestricted flow – coarse spray is projected at 90° from axis at the inlet
- Spray angles: Standard – 43° to 94°



**GANV** – 1/4" to 1/2" female conn.  
Vaneless design  
Removable cap



**GGANV** – 1/4" to 1/2" male conn.  
Vaneless design  
Removable cap

**ORDERING INFORMATION**

**FULLJET SQUARE SPRAY PATTERN**

Inlet Conn.	Nozzle Type	–	Material Code	Capacity Size	<b>Example</b>
					1/4 G – SS 12SQ

BSPT connections require the addition of a "B" prior to the inlet connection.

**FULLJET OVAL SPRAY PATTERN**

Inlet Conn.	Nozzle Type	–	Material Code	Capacity Size	<b>Example</b>
					3/8 G – SS 4.9VL

BSPT connections require the addition of a "B" prior to the inlet connection.

**FULLJET VANELESS DESIGN**

Inlet Conn.	Nozzle Type	–	Material Code	Capacity Size	<b>Example</b>
					1/4 GANV – SS 10

BSPT connections require the addition of a "B" prior to the inlet connection.

**RELATIVE DROP SIZE IN MICRONS**

10 to 100	100 to 500	500 to 1000	1000 to 5000
-----------	------------	-------------	--------------

Drop size will vary based on flow rate and pressure.

**S** PERFORMANCE DATA:  
**STANDARD ANGLE SPRAY**

Inlet Conn. (in.)	Nozzle Type				Capacity Size	Orifice Dia. Nom. (mm)	Max. Free Passage Dia. (mm)	Flow Rate Capacity (liters per minute)										Spray Angle (°)		
	G-SQ	GG-SQ	HH-SQ	H-SQ				0.4 bar	0.5 bar	0.7 bar	1.5 bar	3 bar	6 bar	7 bar	10 bar	0.5 bar	1.5 bar	6 bar		
1-1/4				●	177SQ	12.7	6.4	52	58	67	96	132	181	195	229	78	80	73		
1-1/2				●	230SQ	14.3	8.7	68	75	88	124	171	236	253	298	73	77	70		
2				●	290SQ	15.5	11.1	85	95	111	157	216	297	319	376	66	70	64		
				●	360SQ	17.4	11.1	106	118	137	195	268	369	396	466	70	74	67		
2-1/2				●	480SQ	21	11.1	141	157	183	260	357	492	528	622	79	82	74		
				●	490SQ	19.8	14.3	144	160	187	265	365	502	539	635	62	67	61		
				●	590SQ	22.2	14.3	174	193	225	319	439	604	649	764	75	78	71		
5				●	950SQ	28.6	17.5	280	310	362	514	707	973	1044	1231	81	84	76		
				●	2980SQ	47.6	28.6	878	973	1136	1613	2219	3052	3276	3860	89	91	83		
6				●	5690SQ	81.8	44.5	1677	1858	2169	3080	4236	5827	6255	7371	102	105	95		

Maximum Free Passage Diameter is the maximum diameter as listed of foreign matter that can pass through the nozzle without clogging.

Highlighted column shows the rated pressure.

**W** PERFORMANCE DATA:  
**WIDE ANGLE SPRAY**








Inlet Conn. (in.)	Nozzle Type		Capacity Size	Orifice Dia. Nom. (mm)	Max. Free Passage Dia. (mm)	Flow Rate Capacity (liters per minute)							Spray Angle (°)		
	H-WSQ	HH-WSQ				0.4 bar	0.5 bar	0.7 bar	1 bar	1.5 bar	3 bar	6 bar	0.4 bar	0.7 bar	6 bar
1/4		●	14WSQ	3.6	1.6	4.2	4.6	5.3	6.2	7.5	10.1	13.7	99	101	93
3/8		●	17WSQ	4.0	1.6	5.1	5.6	6.5	7.6	9.1	12.3	16.7	99	101	93
		●	20WSQ	4.4	2.4	6.0	6.6	7.6	8.9	10.7	14.5	19.6	104	110	94
		●	24WSQ	4.8	2.4	7.1	7.9	9.1	10.7	12.8	17.4	24	104	110	94
1/2		●	27WSQ	5.2	2.8	8.0	8.9	10.3	12.0	14.4	19.5	26	104	110	98
		●	30WSQ	5.6	2.8	8.9	9.9	11.4	13.4	16.0	22	29	104	110	102
		●	35WSQ	6.0	3.2	10.4	11.5	13.3	15.6	18.7	25	34	104	110	102
		●	40WSQ	6.4	3.2	11.9	13.1	15.2	17.8	21	29	39	104	110	102
1/2		●	45WSQ	6.4	3.6	13.4	14.8	17.1	20	24	33	44	104	110	102
		●	50WSQ	6.7	4.0	14.9	16.4	19.1	22	27	36	49	104	110	102
3/4	●	●	71WSQ	9.9	4.4	21	23	27	32	38	51	70	105	110	102
1	●	●	130WSQ	13.1	5.6	39	43	50	58	69	94	127	107	110	107
1-1/4	●		190WSQ	15.5	6.4	57	62	72	85	101	137	186	108	111	109
1-1/2	●		290WSQ	18.3	10.3	86	95	111	129	155	210	284	109	114	109
2	●		560WSQ	25	11.1	167	184	213	250	298	405	549	110	114	109
2-1/2	●		830WSQ	31.8	14.3	247	273	316	370	442	600	814	110	115	109
3	●		1070WSQ	34.8	17.5	319	352	408	477	570	774	1049	110	115	109

Maximum Free Passage Diameter is the maximum diameter as listed of foreign matter that can pass through the nozzle without clogging.


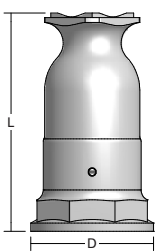



Highlighted column shows the rated pressure.





**DIMENSIONS AND WEIGHTS**

Nozzle	Nozzle Type	Inlet Conn. (in.)	L (mm)	Hex. (in.)	D (Dia.) (mm)	Net Weight (kg)
	<b>G-SQ (F)</b>	1/8	28.5	9/16	—	0.03
		1/4	34.1	11/16	—	0.04
	<b>GG-SQ (M)</b>	1/8	30.1	9/16	—	0.01
		1/4	36.5	11/16	—	0.01
	<b>HH-SQ (M)</b>	1/8	22.2	—	12.7	0.01
		1/4	22.2	—	13.5	0.02
		3/8	23.8	—	16.7	0.05
		1/2	28.7	—	20.6	0.10
		3/4	38.9	—	27.0	0.04
		1	51.6	—	33.3	0.37
	<b>H-SQ (F)</b>	1	68.3	—	38.1	0.37
	<b>H-SQ (F) Cast</b>	1-1/4	68.3	1-7/8 oct.	—	0.48
		1-1/2	101.6	2-1/8 oct.	—	0.72
		2	127.0	2-5/8 oct.	—	1.17
		2-1/2	156.4	3-1/8 oct.	—	2.28
		5	311.2	6-3/4 oct.	—	1.08
		6	365.1	8 oct.	—	1.50

Based on the largest/heaviest version of each type.

Nozzle	Nozzle Type	Inlet Conn. (in.)	L (mm)	Hex. (in.)	D (Dia.) (mm)	Net Weight (kg)
	<b>H-WSQ (F)</b>	3/4	40.5	—	31.7	0.10
		1	52.8	—	38.0	0.18
	<b>H-WSQ (F) Cast</b>	1-1/4	85.7	—	52.4	0.40
		1-1/2	101.6	—	58.7	0.70
		2	127.0	—	76.2	1.28
		2-1/2	156.4	—	87.3	2.06
		3	186.5	—	103.2	3.02
	<b>HH-WSQ (M)</b>	1/4	23.0	—	13.5	0.01
		3/8	30.2	—	16.7	0.03
		1/2	34.9	—	20.6	0.05
		3/4	40.5	—	27.0	0.10
		1	52.8	—	33.3	0.20
	<b>G-VL (F)</b>	3/8	38.1	13/16	57.1	0.06
	<b>GG-VL (M)</b>	3/8	38.1	13/16	57.1	0.05

Based on the largest/heaviest version of each type.

Nozzle	Nozzle Type	Inlet Conn. (in.)	L (mm)	A (mm)	B (mm)	C (mm)	Net Weight (kg)
	<b>GANV (F)</b>	1/4	31.8	22.2	13.6	23.1	0.06
		3/8	35.7	24.6	16.0	27.1	0.09
		1/2	46.0	33.3	19.2	31.9	0.18
	<b>GGANV (M)</b>	1/4	31.8	22.2	13.6	23.1	0.06
		3/8	35.7	24.6	16.0	27.1	0.09
		1/2	47.6	34.9	19.2	31.9	0.18

Based on the largest/heaviest version of each type.