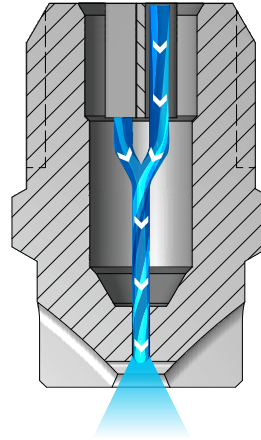


OVERVIEW: WASHJET

- High-impact sprays and high pressure operation ensure optimal cleaning – ideal for pressure washing
 - Long wear life – 400 series stainless steel material
 - Flat spray nozzles provide an even edge fan type spray pattern
 - Uniform spray distribution from .27 to 78 gpm (1.0 to 290 lpm) by using optional internal guide vane to stabilize liquid turbulence
 - Spray angles from 0° (solid stream) to 65° for MEG, WEG and MEG-SSTC; 0° to 80° for IMEG
 - Operating pressures from 300 to 4000 psi (20 to 275 bar)
 - MEG-SSTC nozzles have tungsten carbide orifice inserts for maximum erosion resistance
 - IMEG® versions are ideal for critical, demanding operations
- Features:
- Patented design that optimizes fluid dynamics by minimizing turbulence
 - Higher impact per unit area than MEG nozzles



WashJet Nozzles

As the liquid exits through the rounded U shape of the orifice, it forms into a flat spray pattern. The distribution is even at pressures above 300 psi (20 bar).

WASHJET OPTIONS

S



MEG

1/8" to 1/4" male conn.

S



WEG

1/8" to 1/4" female conn.

S



MEG-SSTC

1/4" male conn.

S



IMEG

1/8" to 1/4" male conn.

ORDERING INFORMATION

WASHJET MEG, WEG, MEG-SSTC AND IMEG WITH GUIDE VANE

Inlet Conn.	Nozzle Type	–	Spray Angle	Capacity Size	Example
					1/4 MEG – 15 04

BSPT connections require the addition of a "B" prior to the inlet connection.

WASHJET MEG, WEG, MEG-SSTC AND IMEG WITHOUT GUIDE VANE

Inlet Conn.	Nozzle Type	–	Spray Angle	Capacity Size	Example
					1/4 SAMEG – 15 04

BSPT connections require the addition of a "B" prior to the inlet connection.



QUICK REFERENCE GUIDE

Model	Connection	Connection Size (in.)	Materials	Page Number	
				Performance Data	Dimensions and Weights
MEG	M	1/8 to 1/4	Hardened stainless steel	C34–C35	C37
WEG	F	1/8 to 1/4		C35	
MEG-SSTC	M	1/4		C34–C35	
IMEG®	M	1/8 to 1/4		C36	
QCMEG	NA	NA		C36	
QCIMEG	NA	NA		C37	

F = female thread; M = male thread; NA = not applicable. Material is built into part number for ordering.
For more dimensions and sizes, contact your sales engineer.

S PERFORMANCE DATA:
STANDARD ANGLE SPRAY



Nozzle Type and Spray Angle																Capacity Size	Flow Rate Capacity (liters per minute)															
1/8 MEG						1/4 MEG						1/4 MEG-SSTC						3 bar	20 bar	35 bar	50 bar	80 bar	100 bar	140 bar	170 bar	200 bar						
0°*	5°	15°	25°	40°	50°	65°	0°*	5°	15°	25°	40°	50°	65°	0°*	5°		15°	25°	40°	50°	65°											
																						01	.39	1.0	1.3	1.6	2.0	2.3	2.7	3.0	3.2	
																							015	.59	1.5	2.0	2.4	3.1	3.4	4.0	4.5	4.8
																							02	.79	2.0	2.7	3.2	4.1	4.6	5.4	5.9	6.4
																							025	.99	2.5	3.4	4.0	5.1	5.7	6.7	7.4	8.1
																							03	1.2	3.1	4.0	4.8	6.1	6.8	8.1	8.9	9.7
																							035	1.4	3.6	4.7	5.6	7.1	8.0	9.4	10.4	11.3
																							04	1.6	4.1	5.4	6.4	8.2	9.1	10.8	11.9	12.9
																							045	1.8	4.6	6.1	7.3	9.2	10.3	12.1	13.4	14.5
																							05	2.0	5.1	6.7	8.1	10.2	11.4	13.5	14.9	16.1
																							055	2.2	5.6	7.4	8.9	11.2	12.5	14.8	16.3	17.7
																							06	2.4	6.1	8.1	9.7	12.2	13.7	16.2	17.8	19.3
																							065	2.6	6.6	8.8	10.5	13.3	14.8	17.5	19.3	21
																							07	2.8	7.1	9.4	11.3	14.3	16.0	18.9	21	23
																							075	3.0	7.6	10.1	12.1	15.3	17.1	20	22	24
																							08	3.2	8.2	10.8	12.9	16.3	18.2	22	24	26
																							085	3.4	8.7	11.5	13.7	17.3	19.4	23	25	27
																							09	3.6	9.2	12.1	14.5	18.3	21	24	27	29
																							095	3.8	9.7	12.8	15.3	19.4	22	26	28	31
																							10	3.9	10.2	13.5	16.1	20	23	27	30	32
																							11	4.3	11.2	14.8	17.7	22	25	30	33	35
																							115	4.5	11.7	15.5	18.5	23	26	31	34	37
																							12	4.7	12.2	16.2	19.3	24	27	32	36	39
																							125	4.9	12.7	16.9	20	25	28	34	37	40

*0° = Solid Stream.

Highlighted column shows the rated pressure.



S PERFORMANCE DATA: **STANDARD ANGLE SPRAY**

Nozzle Type and Spray Angle																		Capacity Size	Flow Rate Capacity (liters per minute)													
1/8 MEG						1/4 MEG						1/4 MEG-SSTC							3 bar	20 bar	35 bar	50 bar	80 bar	100 bar	140 bar	170 bar	200 bar					
0°*	5°	15°	25°	40°	50°	65°	0°*	5°	15°	25°	40°	50°	65°	0°*	5°	15°	25°											40°	50°	65°		
•							•		•	•	•											13	5.1	13.3	17.5	21	27	30	35	39	42	
	•								•	•													14	5.5	14.3	18.9	23	29	32	38	42	45
•		•	•				•	•	•	•	•	•	•	•		•		•		•			15	5.9	15.3	20	24	31	34	40	45	48
		•					•		•														16	6.3	16.3	22	26	33	36	43	48	52
							•		•	•	•				•								18	7.1	18.3	24	29	37	41	49	53	58
•							•	•	•	•	•	•	•	•	•								20	7.9	20	27	32	41	46	54	59	64
							•	•	•	•	•												25	9.9	25	34	40	51	57	67	74	81
							•	•	•	•	•		•										30	11.8	31	40	48	61	68	81	89	97
							•		•	•	•												35	13.8	36	47	56	71	80	94	104	113
							•	•	•	•	•												40	15.8	41	54	64	82	91	108	119	129
							•		•	•	•												50	19.7	51	67	81	102	114	135	149	161
							•		•	•	•												60	24	61	81	97	122	137	162	178	193
							•																70	28	71	94	113	143	160	189	208	226
							•																80	32	82	108	129	163	182	216	238	258
							•																90	36	92	121	145	183	205	243	267	290

*0° = Solid Stream.

Highlighted column shows the rated pressure.

S PERFORMANCE DATA: **STANDARD ANGLE SPRAY**

Nozzle Type and Spray Angle														Capacity Size	Flow Rate Capacity (liters per minute)									
1/8 WEG							1/4 WEG								3 bar	20 bar	35 bar	50 bar	80 bar	100 bar	140 bar	170 bar	200 bar	
0°*	5°	15°	25°	40°	50°	65°	0°*	5°	15°	25°	40°	50°	65°											
		•	•	•											03	1.2	3.1	4.0	4.8	6.1	6.8	8.1	8.9	9.7
•		•	•	•	•	•	•		•	•	•		•		04	1.6	4.1	5.4	6.4	8.2	9.1	10.8	11.9	12.9
		•	•	•					•	•	•				045	1.8	4.6	6.1	7.3	9.2	10.3	12.1	13.4	14.5
•		•	•	•	•	•	•	•	•	•	•	•	•	•	05	2.0	5.1	6.7	8.1	10.2	11.4	13.5	14.9	16.1
•		•	•	•	•	•	•	•	•	•	•				055	2.2	5.6	7.4	8.9	11.2	12.5	14.8	16.3	17.7
•		•	•	•	•	•	•	•	•	•	•				06	2.4	6.1	8.1	9.7	12.2	13.7	16.2	17.8	19.3
				•					•						065	2.6	6.6	8.8	10.5	13.3	14.8	17.5	19.3	21
•		•	•	•	•	•	•	•	•	•	•		•		07	2.8	7.1	9.4	11.3	14.3	16.0	18.9	21	23
•		•	•	•	•	•	•	•	•	•	•				08	3.2	8.2	10.8	12.9	16.3	18.2	22	24	26
•		•	•	•											085	3.4	8.7	11.5	13.7	17.3	19.4	23	25	27
•		•	•	•	•	•	•	•	•	•	•				09	3.6	9.2	12.1	14.5	18.3	21	24	27	29
			•												095	3.8	9.7	12.8	15.3	19.4	22	26	28	31
•		•	•	•	•	•	•	•	•	•	•				10	3.9	10.2	13.5	16.1	20	23	27	30	32
							•								15	5.9	15.3	20	24	31	34	40	45	48
		•													16	6.3	16.3	22	26	33	36	43	48	52
•															20	7.9	20	27	32	41	46	54	59	64
							•								30	11.8	31	40	48	61	68	81	89	97

*0° = Solid Stream.

Highlighted column shows the rated pressure.






S PERFORMANCE DATA:
STANDARD ANGLE SPRAY



Nozzle Type	Spray Angle at 3 bar				Capacity Size	Flow Rate Capacity (liters per minute)										
	10° (Orange)	15° (Yellow)	25° (Green)	40° (White)		3 bar	20 bar	35 bar	50 bar	80 bar	100 bar	140 bar	170 bar	200 bar	250 bar	275 bar
●			●	●	02	.79	2.0	2.7	3.2	4.1	4.6	5.4	5.9	6.4	7.2	7.6
●	●	●	●	●	03	1.2	3.1	4.0	4.8	6.1	6.8	8.1	8.9	9.7	10.8	11.3
●	●	●	●	●	035	1.4	3.6	4.7	5.6	7.1	8.0	9.4	10.4	11.3	12.6	13.2
●	●	●	●	●	04	1.6	4.1	5.4	6.4	8.2	9.1	10.8	11.9	12.9	14.4	15.1
●	●	●	●	●	045	1.8	4.6	6.1	7.3	9.2	10.3	12.1	13.4	14.5	16.2	17.0
●	●	●	●	●	05	2.0	5.1	6.7	8.1	10.2	11.4	13.5	14.9	16.1	18.0	18.9
●	●	●	●	●	055	2.2	5.6	7.4	8.9	11.2	12.5	14.8	16.3	17.7	19.8	21
●	●	●	●	●	06	2.4	6.1	8.1	9.7	12.2	13.7	16.2	17.8	19.3	22	23
●	●	●	●	●	065	2.6	6.6	8.8	10.5	13.3	14.8	17.5	19.3	21	23	25
●	●	●	●	●	07	2.8	7.1	9.4	11.3	14.3	16.0	18.9	21	23	25	26
●	●	●	●	●	075	3.0	7.6	10.1	12.1	15.3	17.1	20	22	24	27	28
●	●	●	●	●	08	3.2	8.2	10.8	12.9	16.3	18.2	22	24	26	29	30
●		●	●	●	09	3.6	9.2	12.1	14.5	18.3	21	24	27	29	32	34

Highlighted column shows the rated pressure.

DIMENSIONS AND WEIGHTS

Nozzle	Nozzle Type	Inlet Conn. (in.)	L (mm)	Hex. (in.)	D (Dia.) (mm)	Flats (mm)	Net Weight (kg)
	MEG (M)	1/8	25.4	9/16	-	7.9	0.02
		1/4	25.4	9/16	-	10.3	0.02
	WEG (F)	1/8	28.6	1/2	-	7.9	0.03
		1/4	28.6	5/8	-	7.9	0.02
	MEG-SSTC (M)	1/4	23.0	9/16	-	10.3	0.02

Based on the largest/heaviest version of each type.

Nozzle	Nozzle Type	Inlet Conn. (in.)	L (mm)	Hex. (in.)	D (Dia.) (mm)	Flats (mm)	Net Weight (kg)
	IMEG® (M)	1/8	22.2	1/2	-	7.9	0.02
		1/4	23.0	9/16	-	10.3	0.02
	QCIMEG/ QCIMEG	-	31.0	-	24.6	-	0.02

Based on the largest/heaviest version of each type.